

AdkinsProAudio.com

ELA215P-LED



SAFETY PRECAUTIONS

Installation of this speaker cabinet must be carried out by qualified personnel following the approved safety standards.

Do not attempt to clean the plastic enclosure with solvents or petrochemical based cleaners.

Do not place objects which are sources of heat on the speaker cabinet such as lighting equipment or smoke machines.

Do not expose the speaker cabinet to direct rain or stand in water. Liquid getting into the box will risk a short circuit and will be hazardous.

Do not stack the speaker cabinet in a manner that could cause injury should a cabinet become dislodge.

Additional precautions for Powered ELA Series Speakers.

Before installation, ensure that the voltage and frequency of power outlet match the power requirements of the loudspeaker.

Unplug power before making connections to the loudspeaker.

Make sure that the power-cord is never crimped or damaged by sharp edges. Never let the power-cord come into contact with other cables. Only handle the power-cord by the plug.


When replacing the fuse, it must be replaced with by identical specs and dimensions.

Attention

Before connecting or operating your new loudspeaker, please study the accompanying instruction manual paying special attention to the operating precautions and wiring procedure.



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

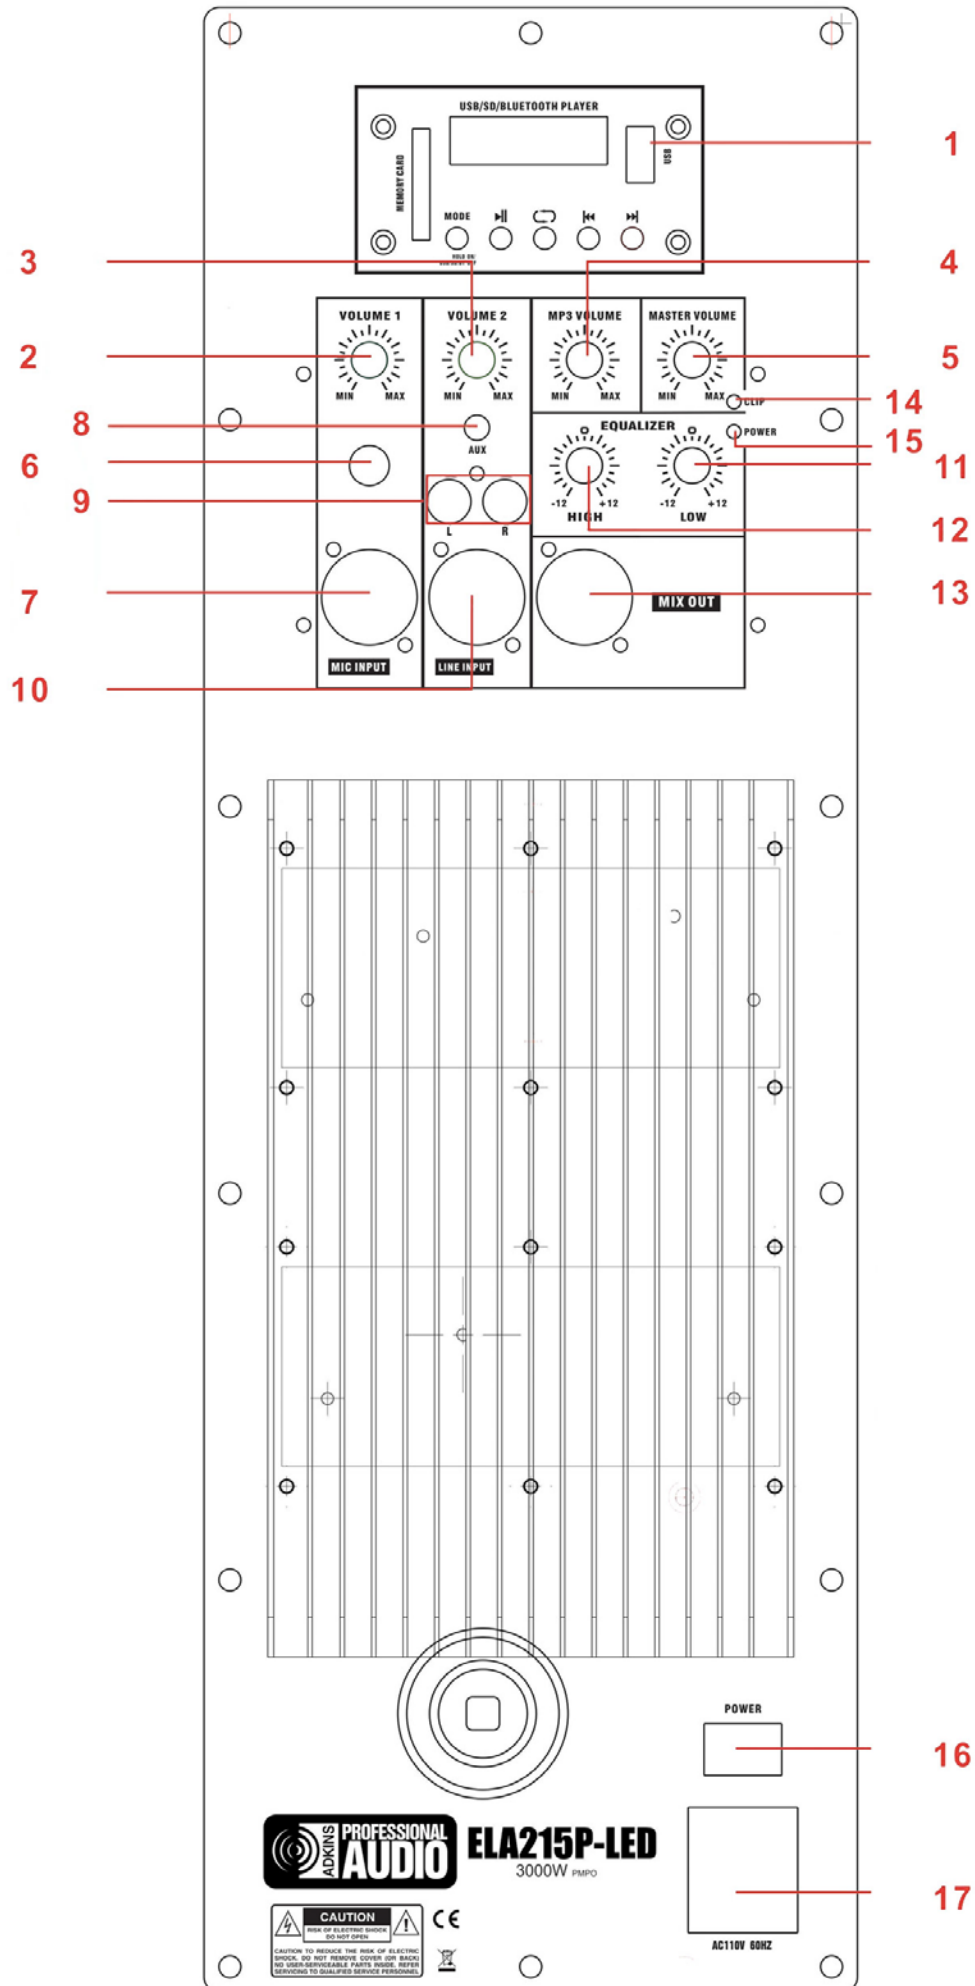

ELA215P-LED
3000W PMPO

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER REPAIR TO QUALIFIED SERVICE PERSONNEL.







POWER



AC110V 60HZ

Functions

1. USB Player

MODE	Exchange between USB / SD / BLUETOOTH
	Play/Pause
	Repeat
	Last
	Next

2. Volume1 : Control the Volume of Microphone input .
3. Volume 2 : Control the Volume of line in.
4. MP3 Volume : Control the volume of MP3.
5. Master Volume: Control the master volume
6. 1/4Jack for Mic input.
7. XLR for Mic input.
8. AUX input
9. RCA connector to control Line input , RCA right channel input ; RCA left channel input
10. XLR connector to control Line input , Allows you to connect an external audio device (CD,radio,DVD,etc.), with a Cannon connector
11. Equalizer : Control the tone level of low frequency at range -12dB to + 12dB.
12. Equalizer : Control the tone level of high frequency at range -12dB to + 12dB.
13. XLR connector to control Line out ; connect other amplifier or even another powered speaker cabinet in cascade.
14. Clip LED : it is light up when the applied input signal reaches to distortion , reduce the input level to eliminate the distortion .
15. Power LED, when connect the power which light up.
16. Power Switch: It allows to switch on/off the unit.
17. Main supply inlet: Connect here an IEC main power cable in order to supply the unit.