

Technical:


Voltage: AC110-220V 50/60HZ

Power supply: 70W

Color: RGBAW 5IN1 LED

Channel: 9/5CH

Operation: DMX512, Auto, Sound, Master-slave

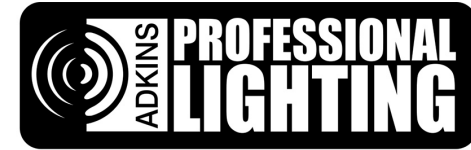

AdkinsProLighting.com

HEX FLAT PAR

7X10W RGBAW



User's Manual

(330) 436-3260 Fax: (330) 436-3283

E-mail: support@adkinsprolighting.com

www.adkinsprolighting.com

DMX512Control : 9 Channel Mode (A001)

CH	Display	Function
CH1	Dimmer	R、G、B、W、Ydimmer : from dark to bright
CH2	R dimmer	R dimmer : from dark to bright
CH3	G dimmer	G dimmer : from dark to bright
CH4	B dimmer	B dimmer : from dark to bright
CH5	A dimmer	A dimmer: from dark to bright
CH6	W dimmer	W dimmer: from dark to bright
CH7	Strobe	R、G、B、A、W strobe: from slow to fast
CH8	Function choice	0~50: DMX 8CH Control. 51~100: Different Colors Output 101~150: Colors Jump Change. 151~200: Colors Gradate. 201~250: Colors Pulse Change. 251~255: Sound-Active
CH9	Function speed	Speed function, from slow to fast

DMX512Control : 5 Channel Mode (D001)

Channel	Function	Instruction
CH1	R Dimmer	Dimmer- Dark to Bright
CH2	G Dimmer	Dimmer- Dark to Bright
CH3	B Dimmer	Dimmer- Dark to Bright
CH4	A Dimmer	Dimmer- Dark to Bright
CH5	W Dimmer	Dimmer- Dark to Bright